

Product Datasheet model uvex i-5 9183 223

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**


1. Product Characteristics

- sporty premium quality safety spectacle with a range of adaptive features
- x-tended eyeshield: soft seal frame technology wraps around the brow providing protection from particle ingress
- x-tended sideshield offers additional protection from hazards
- ergonomically shaped side arms with multi-incline points and length adjustment allow for a high level of individualization to ensure a good fit for all facial shapes and head widths
- soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

2. Technical Details Body

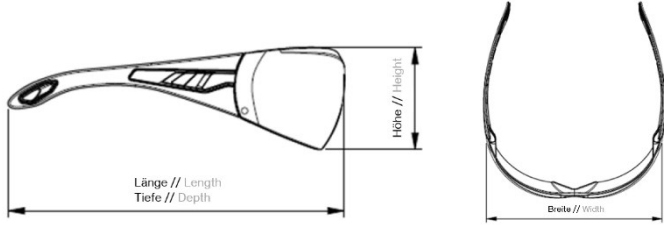
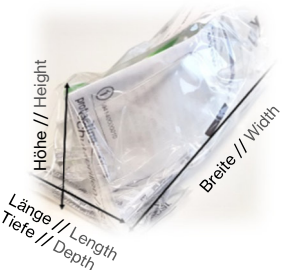
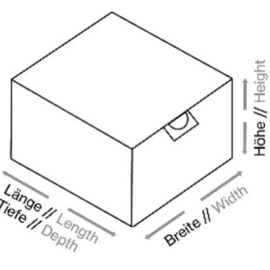
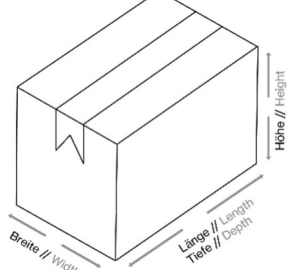
| Frame | |
|---|---|
| Material | TPU / TPE / POM |
| Version | multi-incline points, individually adjustable |
| Colour | white, black |
| Marking | |
| Manufacturer 's ID code | W |
| Applicable EN norm | 166 |
| Impact resistance | F (45 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Conformity symbol | CE |

3. Technical Details Lens

| Material | PC |
|---|---|
| Thickness | 1.9 mm at PD |
| Coating | uvex supravision excellence |
| Colour | CBR23 |
| UV protection | UV400 |
| Marking | |
| Filter | 5-2.5 (EN 172) |
| Manufacturer 's ID code | W |
| Optical class | 1 |
| Impact resistance | F (45 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Scratch resistance | K |
| Antifog | N |
| Conformity symbol | CE |
| Factory symbol |  |

4. Logistical Information

Product

| | | | |
|---|--|---|--|
| Weight | 29g | | |
| Dimensions (L x W x B) in approx. mm |  <p style="text-align: right;">picture only for reference</p> | | |
| | 158 x 148 x 50 | | |
| | Packing unit 1 | Packing unit 2 | Packing unit 3 |
| EAN Code | 4031101963433 | 4031101963433 | 4031101963433 |
| Quantity in pcs. | 1 | 10 | 160 |
| Dimensions (L x W x H) in approx. mm |  <p style="text-align: center;">picture only for reference</p> |  |  |
| | 60 x 150 x 58 | 185 x 290 x 97 | 600 x 400 x 400 |
| Net weight in approx. g | 29 | 290 | 4,640 |
| Gross weight in approx. g | 43 | 535 | 9,430 |
| Country of Origin | Germany | | |

5. Miscellaneous

| | |
|--------------|-----------------|
| Standards | EN 166 + EN 172 |
| PPE Category | Category II |